


Salt Chlorine Generators

FOR EXPORT ONLY



- Durable design
- Economical to use
- Simple operation & maintenance
- Large chlorine capacity
- Low energy consumption
- Comprehensive warranty

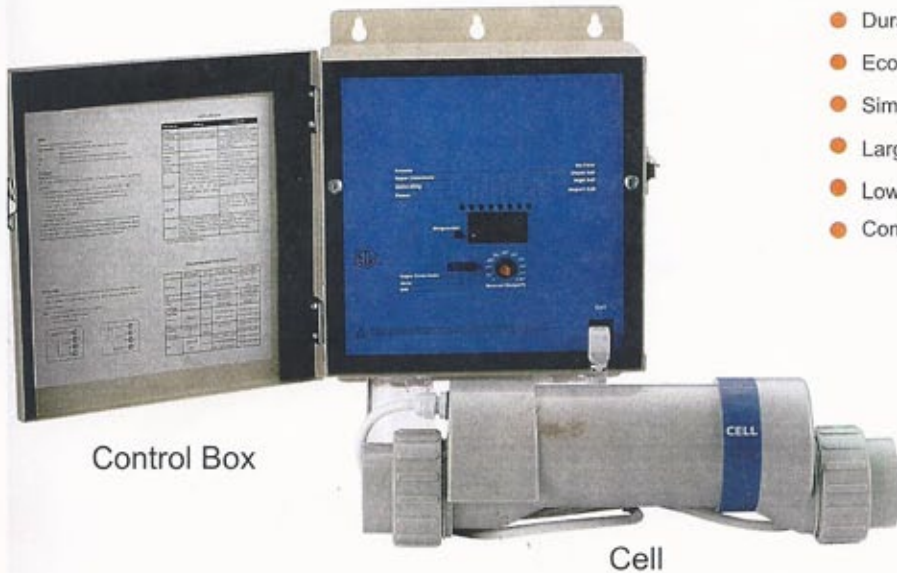

Features

- Digital display and LED indicators
- Self-cleaning
- Adjustable chlorine output
- Super chlorine model
- Water flow detector
- Low salt and overload indicators
- High & low temperature protection (Working temperature from 50F to 140F)

Specification:

	BW-CL60	BW-CL120
Input Power:	110V 60Hz	110V 60Hz
Pool Size:	20000gal	40000gal
Chlorine Output:	18g/h	30g/h
Salinity Range:	2700 - 3400ppm	2700 - 3400ppm
Cell Body Material:	UV inhibited ABS	UV inhibited ABS
Electrodes:	Titanium	Titanium
Pipe Size:	2"	2"
Cell Cable:	15FT standard, Any length available	15FT standard, Any length available
Carton Dimensions:	18.5 x 14.2 x 8.7 inch	18.5 x 14.2 x 8.7 inch