



These pumps used advanced technology with high efficiency and minimized noise .The pumps are designed and manufactured according to all the requirements by CSA and ETL. Pump casing is made of reinforced plastic. The strainer includes a big filter basket, a see-thru cover for quick inspect of the strainer.



### Dimensions

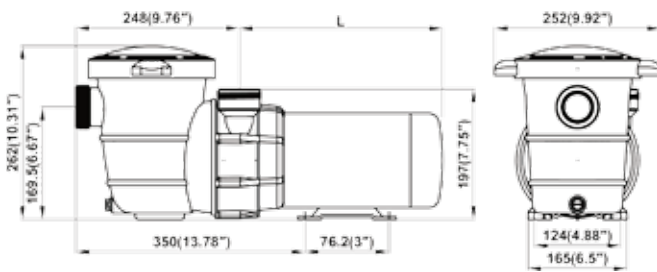

### Performance Curves

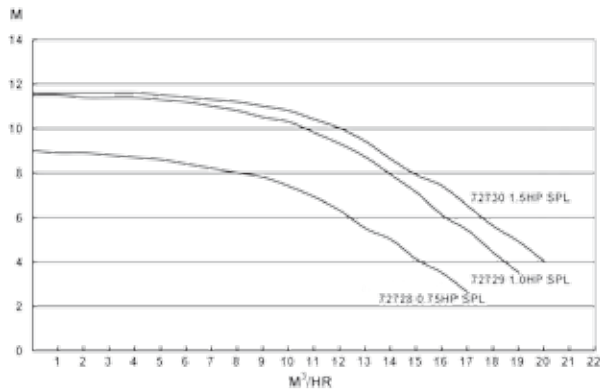

Optional connectors

### Application

- Above ground pools of all types (including in-floor cleaning systems, solar heating systems, water features or water gardens)

### Features

- Easy thread design makes strainer cover removal easy
- See-thru strainer cover for you quick check when basket needs cleaning.
- Special PVC connector for quick connect and less time using. As following picture shows "optional connectors"
- All components molded of corrosion-proof reinforced thermoplastic for extra durability and long life
- Service-easy designed drain plug for easy maintenance in winter
- Using of the mechanical seals to lengthen the life and lower the lower the noise.



Model Number	H.P.	Voltage	Hertz	Amps	Flow Rate	Pipe Size	Dimension "L"	Carton Dimension (cm)
72728	0.75 SPL	115	60	7.3	62GPM	1 1/2"	292(11.5")	58.5*21.5*26.5
72729	1.0 SPL	115	60	9.2	75GPM	1 1/2"	299(11.8")	58.5*21.5*26.5
72730	1.5 SPL	115	60	12	83GPM	1 1/2"	305(12")	58.5*21.5*26.5
72726 two speed	1.0/0.41 SPL	115	60	10/3.2	75/36GPM	1 1/2"	300(11.84")	59.5*21.5*26.5
72727 two speed	1.5/0.46 SPL	115	60	12/3.6	83/40GPM	1 1/2"	306(12.04")	59.5*21.5*26.5